




GNSS Ceramic Thru-Hole Mount Antenna



18*18 *4 mm

RoHS/RoHS II Compliant

Part Number: G-2RE2

Features

- High Gain
- Compact Size and Low Profile
- Pin Type
- Customization Available
- IP67 rated
- RoHS Compliance

Applications

- Automotive navigation
- Marine buoys
- Surveying equipment
- Cell phone
- Laptop
- Healthcare and medical monitoring devices
- PND & PDA

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
GPS/QZSS/Galileo Frequency	1616-1627		MHz		
IRIDIUM Frequency	1575.42		MHz		
-10dB Bandwidth	6			MHz	
Gain (Zenith@90°)			3.7	dB	(Peak gain on standardized Ground Plane.)
VSWR at CF			1.3		
Impedance	50		Ω		
Polarization Model	RHCP				(Right Hand Circular Polarization)
Frequency Temperature Coefficient			20	ppm/°C	

(*) Application environment, including size of ground plane will affect stated performance. Fine tuning might be required when installed on customer's PCB.




GNSS Ceramic Thru-Hole Mount Antenna



Part Number: G-2RE2


18*18*4 mm
RoHS/RoHS II Compliant

Product Dimensions & Pictures

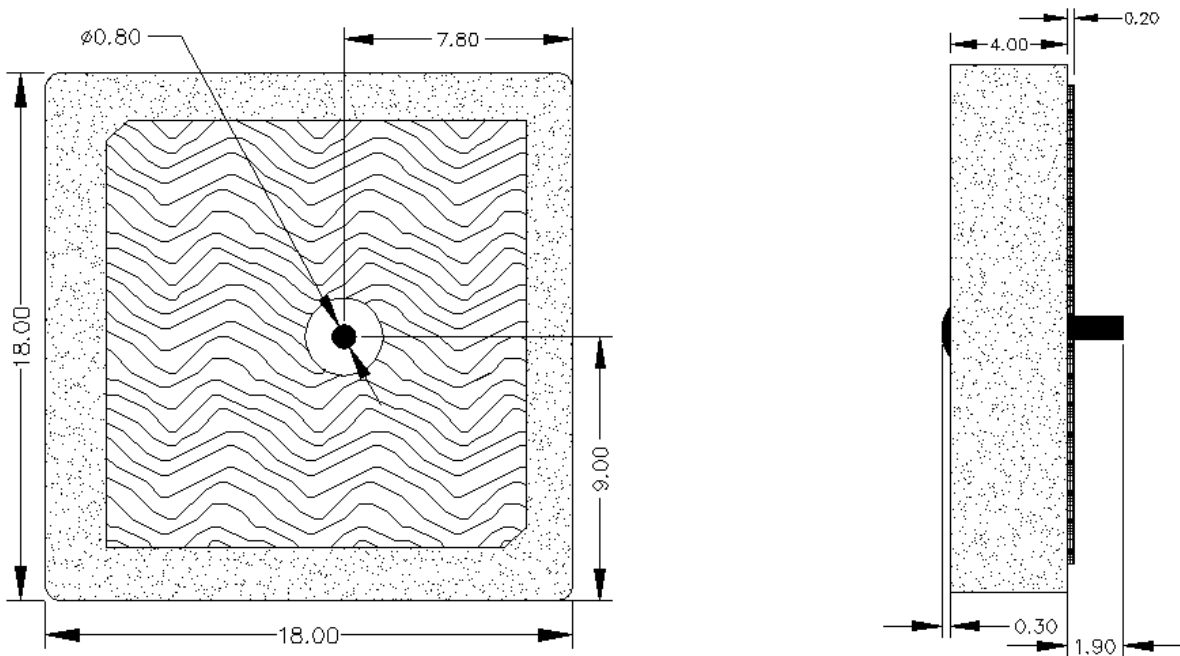




GNSS Ceramic Thru-Hole Mount Antenna



Part Number: G-2RE2

18*18 *4 mm
RoHS/RoHS II Compliant

Radiation pattern reference

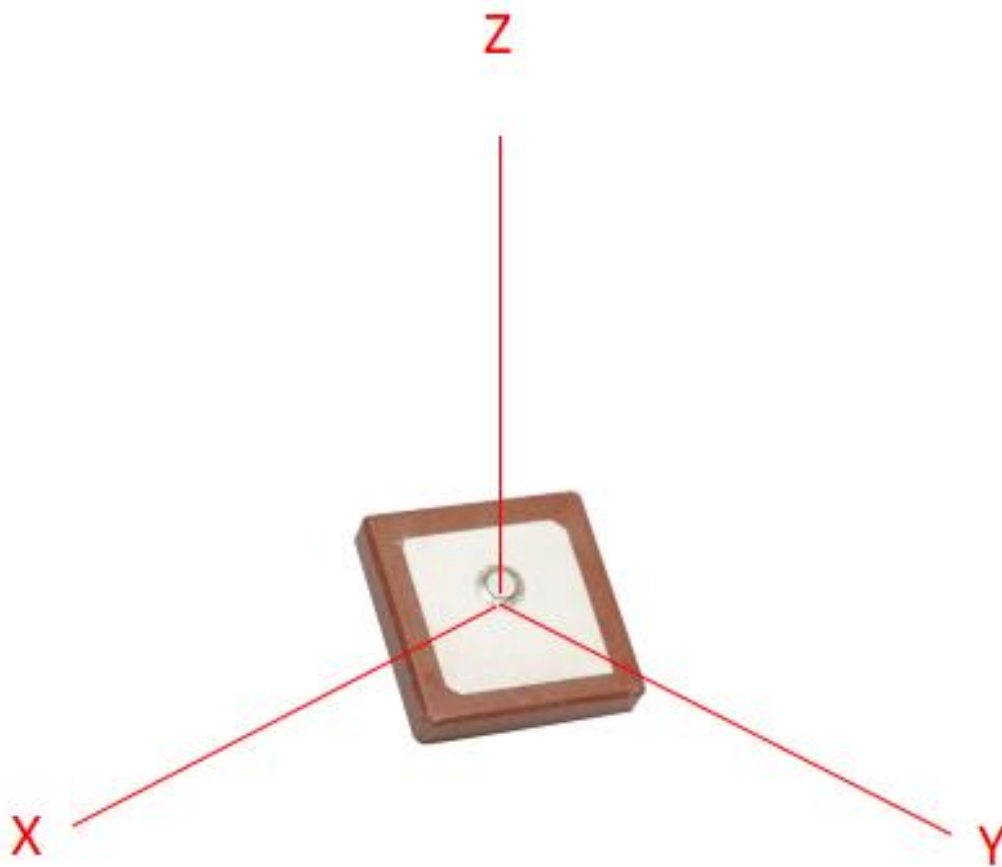




GNSS Ceramic Thru-Hole Mount Antenna



Part Number: G-2RE2

18*18 *4 mm
RoHS/RoHS II Compliant

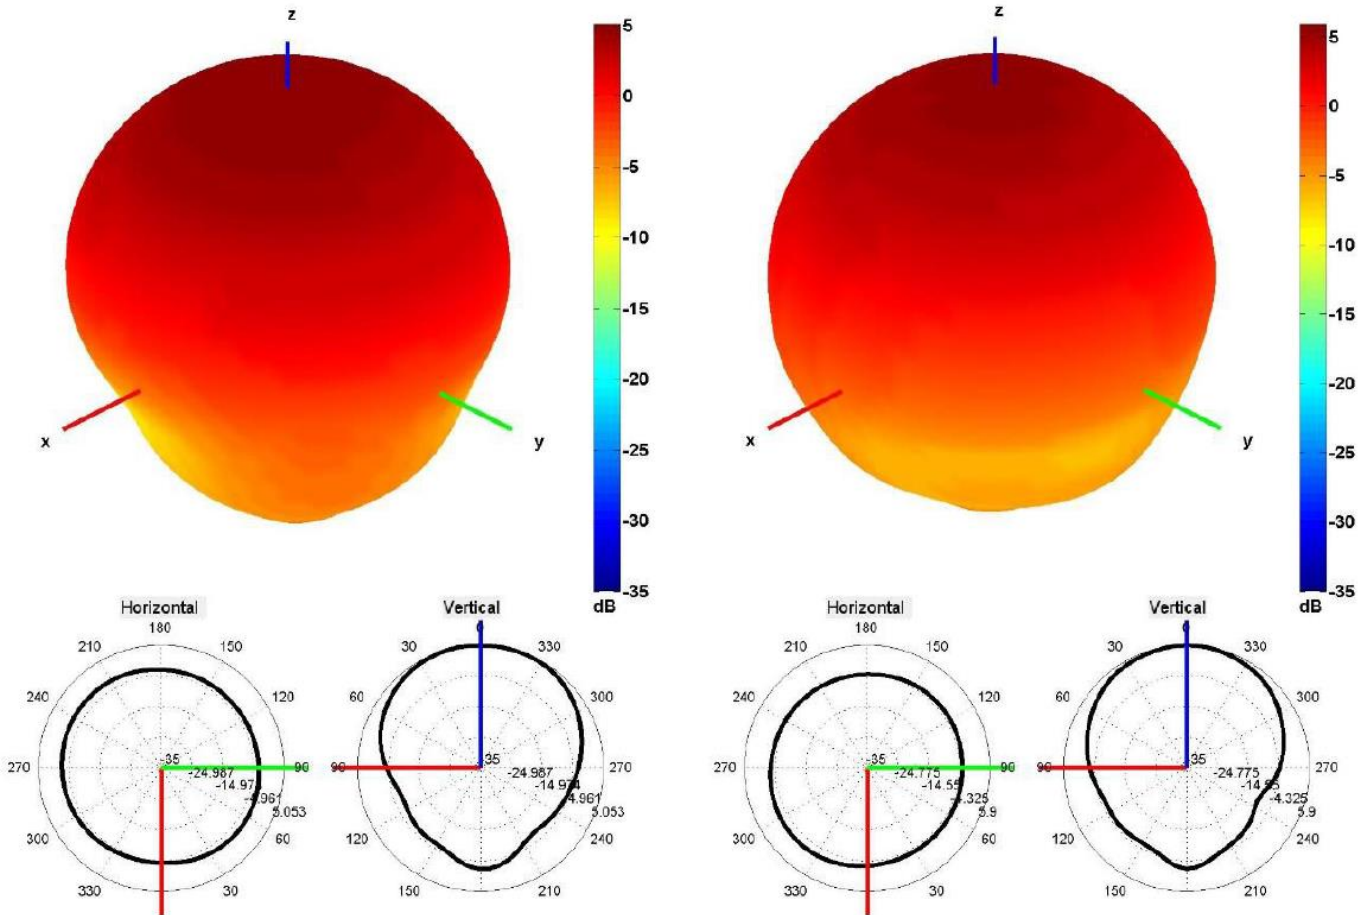

1575 AND 1621 MHz RADIATION PATTERN



GNSS Ceramic Thru-Hole Mount Antenna





18*18 *4 mm

RoHS/RoHS II Compliant


Part Number: G-2RE2

Antenna parameters

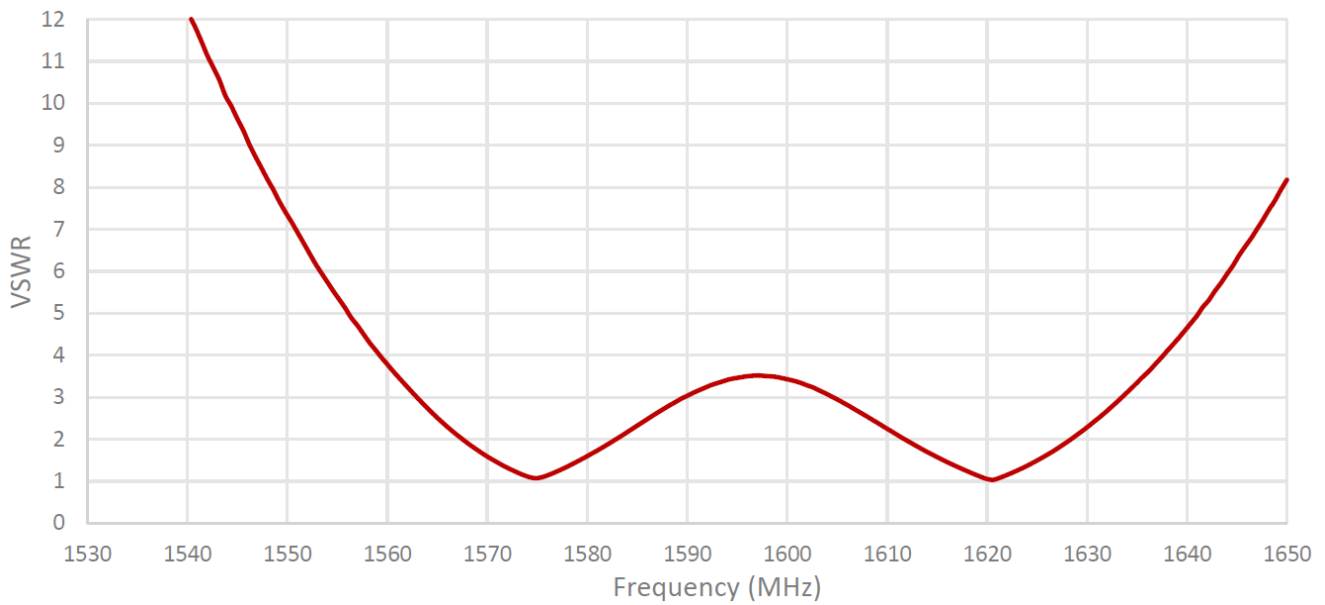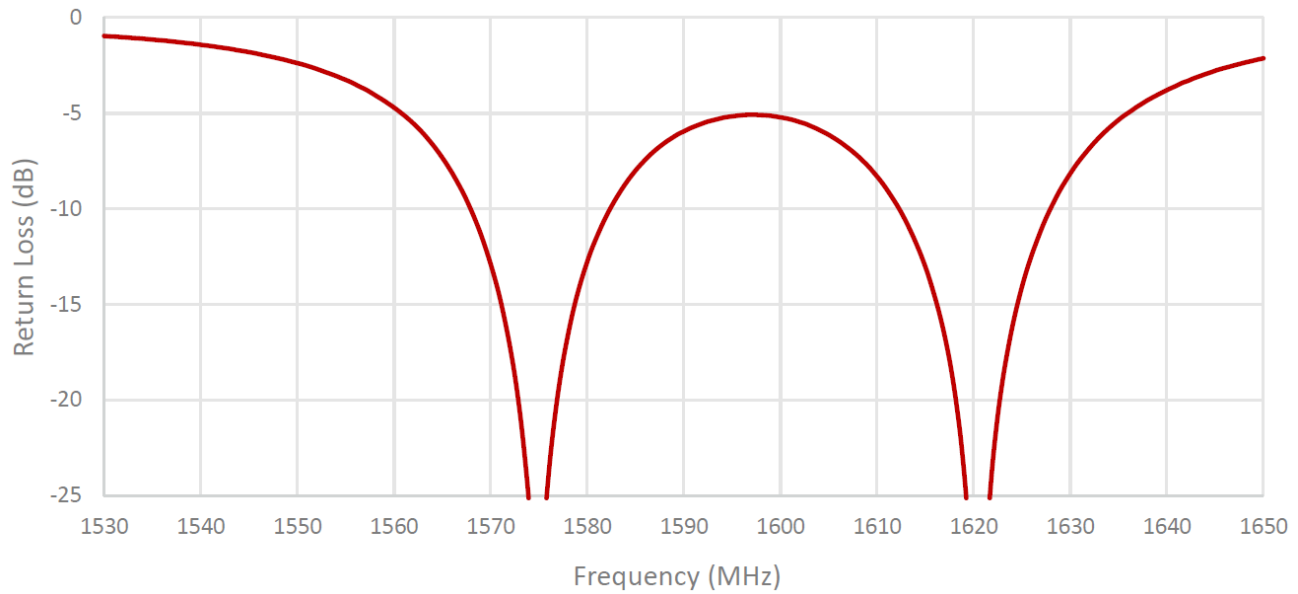





GNSS Ceramic Thru-Hole Mount Antenna




18*18 *4 mm
RoHS/RoHS II Compliant

Part Number: G-2RE2

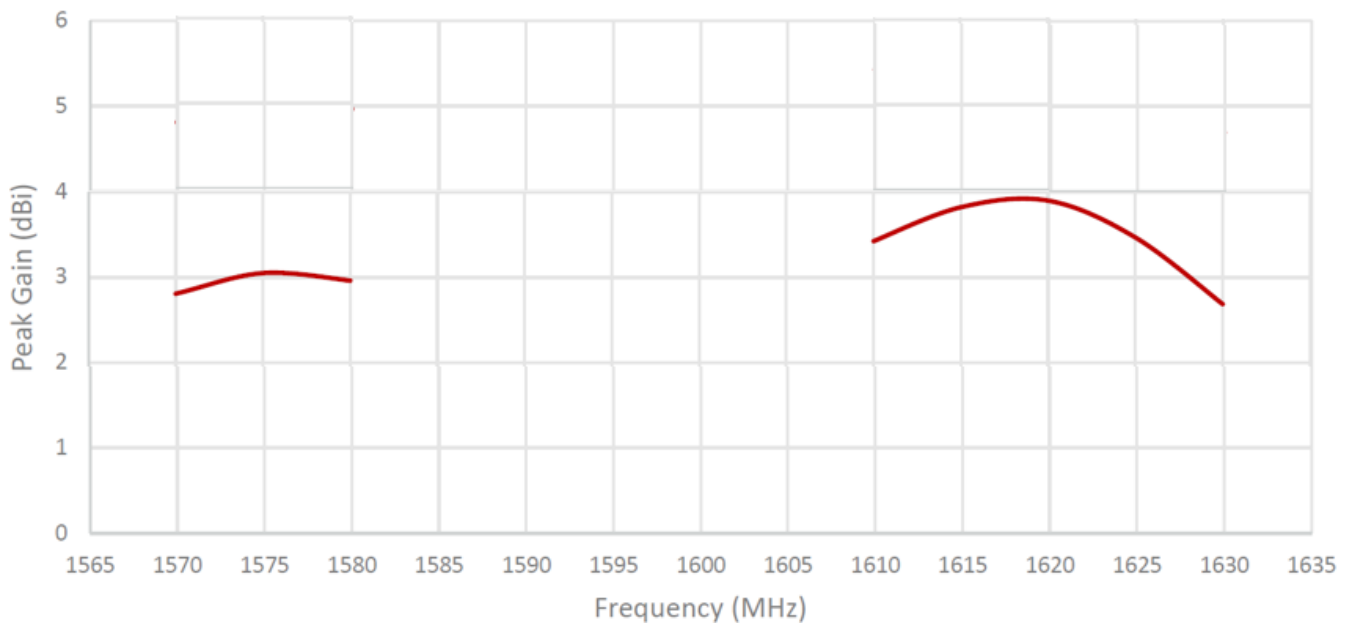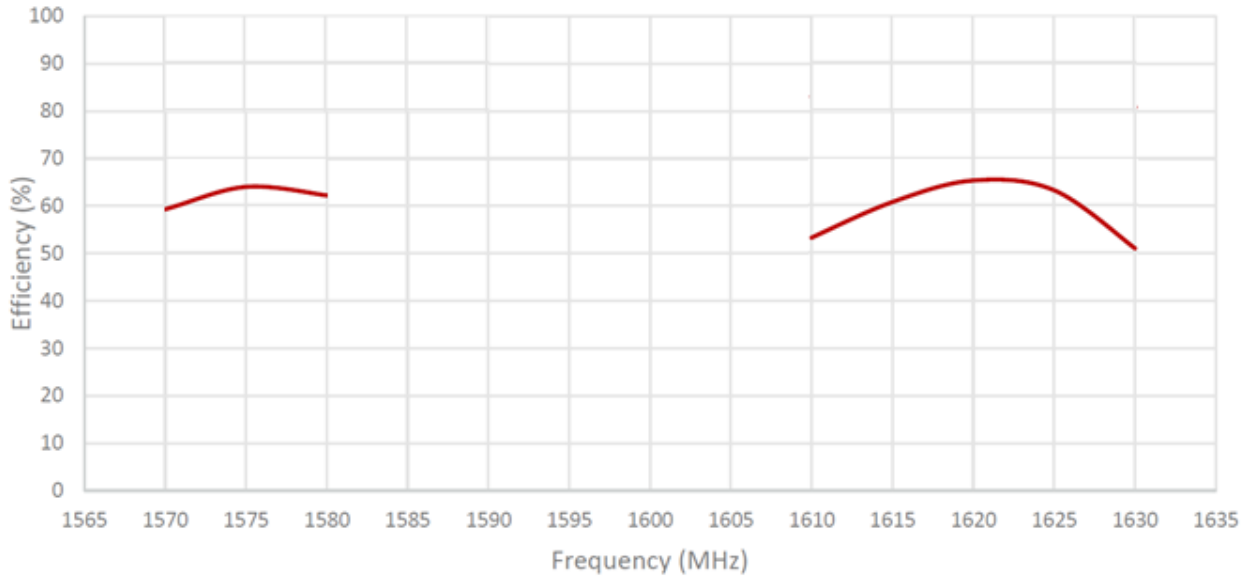




GNSS Ceramic Thru-Hole Mount Antenna



Part Number: G-2RE2

18*18*4 mm
RoHS/RoHS II Compliant

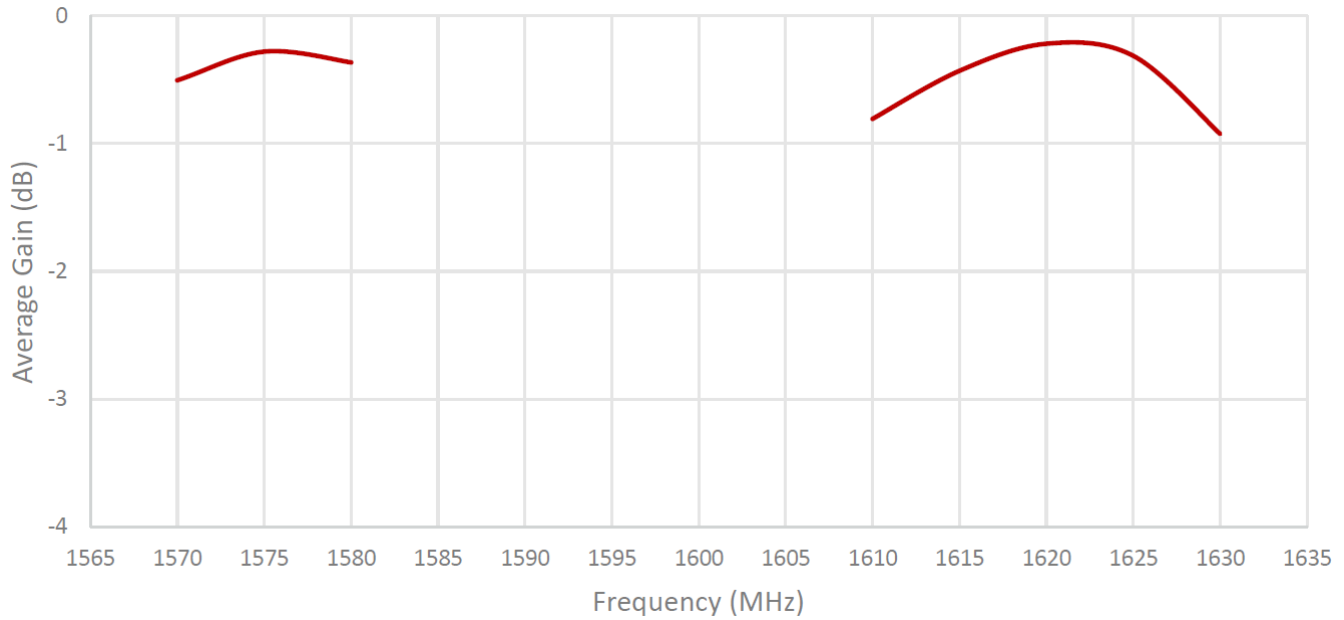



MiotWireless

Miot Wireless Solutions Ltd

<http://www.mioticsolutions.com>

Info@mioticsolutions.com

GNSS Ceramic Thru-Hole Mount Antenna



Part Number: G-2RE2

18*18 *4 mm

RoHS/RoHS II Compliant

Packaging

TBD

Caution:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please ensure the component is thoroughly evaluated in the application circuit.