



# R5020 robustOS

High Speed Smart 5G Router

4 Eth + 1 RS232 + 1 RS485 + 1 DI + 1 DO



## INTRODUCTION

The R5020 is Robustel’s first 5G capable router supporting global 5G, 4G and 3G bands. The R5020 leverages the tried and tested high performance CPU platform and **RobustOS** – a mature and stable Operating System developed in-house by Robustel. R5020 is compatible with 3GPP Release 15 and targeted at the following applications:

**In-vehicle Applications** – whether it is passenger Wi-Fi, CCTV debrief, ticketing or a similar “onboard” requirement, the R5020 offers a simple and effective to increase internet speeds and future-proof current installations well into the future. R5020 has achieved E-Mark certification for in-vehicle use and supports GNSS positioning. A version with vehicle ignition sensing is available to protect vehicle batteries when the engine is off.

**Broadband Failover** – R5020 can be configured to use Ethernet or Wi-Fi as primary internet and failover to 4G/5G in the event of an outage. This can help to provide resilience to outlets such as shops and small offices at a reasonable cost and provide sufficient bandwidth for multiple users. IPsec, DMVPN and OpenVPN protocols can be used for connections into core networks.

**Primary Broadband** – Cellular networks can now provide unlimited 5G tariffs at very reasonable prices, offering hundreds of Mbps internet over the air. For many, a chance to cut the cables and use a wireless internet connection can be technically or commercially favorable.


**RCMS** is Robustel’s free router monitoring service that is fully compatible with the R5020. It allows customer to see a location overview of their routers quickly and simply on a map. Features such as data usage, signal strength, current network and much more can then be viewed on a per router basis. Over-the-air updates are supported for Firmware, router configuration and Apps serving as essential ‘insurance’ if anything was not quite right during deployment. You can try Robustel’s free router management platform by signing up here: <https://rcms-cloud.robustel.net>

## KEY FEATURES

- Global 5G/4G/3G cellular connections
- Supports Ethernet, Wi-Fi and 4G/5G internet with auto-failover
- Very cost-effective industrial 5G router solution
- Fully programmable Operating System with well documented SDK
- Multiple VPN options available including DMVPN & IPsec
- GNSS, ignition sense & E-mark make R5020 ideal for vehicles
- Free cloud management platform - RCMS
- Robust metal enclosure with small footprint – DIN-rail + wall mount options



## APPLICATION EXAMPLE

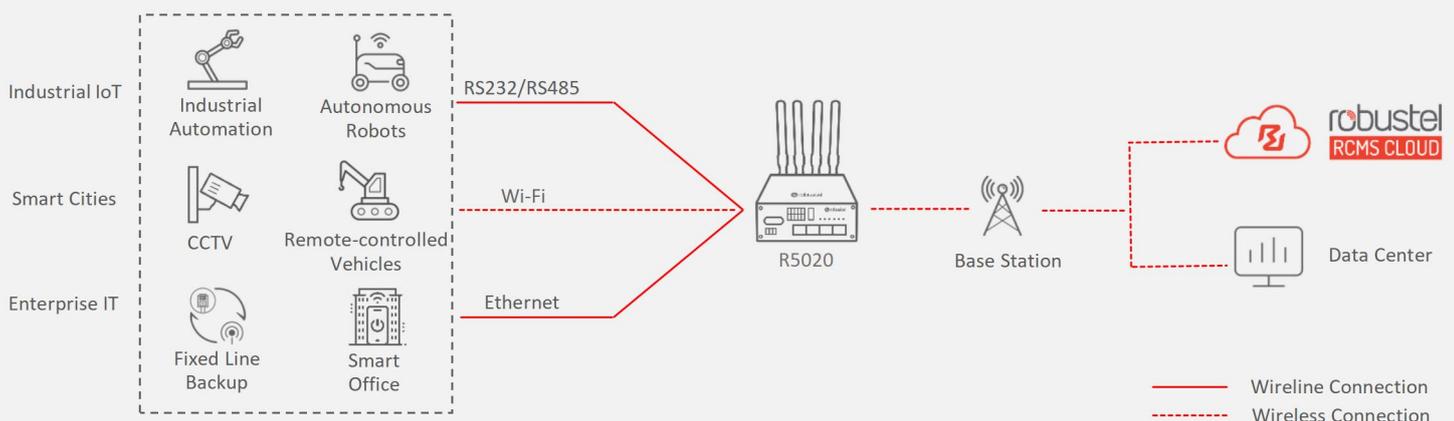

# SPECIFICATIONS

## Cellular Interface

|                    |                               |
|--------------------|-------------------------------|
| Number of antennas | 4 (ANT0 + ANT1 + ANT2 + ANT3) |
| Connector          | SMA-K                         |
| SIM                | 2 Mini SIM (2FF)              |

## GNSS (Optional, required 4-in-1 Combo Antenna)

|                              |   |
|------------------------------|---|
| Number of antennas           | 1 (ANT3, Multiplexing cellular antenna interface) |
| Connector                    | SMA-K   |
| GNSS technology              | GPS/GLONASS/BeiDou (Compass)/Galileo              |
| Horizontal position accuracy | < 2m  |

## Ethernet Interface

|                             |   |
|-----------------------------|---|
| Number of ports             | 4 x 10/100/1000 Mbps,<br>4 LAN by default, can be configured as<br>1 WAN + 3 LAN<br>Support 802.3at PD feature on ETH0 (optional) |
| Magnet isolation protection | 1 KV  |

## Wi-Fi Interface

|                    |   |
|--------------------|---|
| Number of antennas | 2 (Wi-Fi1 + Wi-Fi2)   |
| Connector          | RP-SMA-K  |
| Standards          | 802.11b/g/n/ac, 2 x 2 MIMO, supports AP and Client modes                  |
| Frequency bands    | 2.412 - 2.472 GHz (2.4 GHz ISM band)<br>5.15 - 5.825 GHz (5 GHz ISM band) |
| Security           | WPA, WPA2, WEP  |
| Encryption         | AES, TKIP, WEP64  |
| Data speed         | 5G: Up to 867 Mbps<br>2.4G: Up to 300 Mbps                                |

## Serial Interface

|                   |   |
|-------------------|---|
| Number of ports   | 1 x RS232 + 1 x RS485   |
| Connector         | 2 x 5-pin 3.5 mm female socket                                    |
| ESD protection    | ±8 KV air discharge, ±4 KV contact discharge                      |
| Baud rate         | 300 bps ~ 115200 bps  |
| Signal definition | RS232: TXD, RXD, GND<br>RS485: Data+ (A), Data- (B), Ground (GND) |

## DI/DO

|                      |                                 |
|----------------------|---------------------------------|
| Type                 | 1x DI + 1 x DO, wet contact     |
| Connector            | 2 x 5-pin 3.5 mm female socket  |
| Isolation            | 3.75 KVDC (opto-isolator)       |
| Absolute maximum VDC | “V+” +30 VDC (DI), +30 VDC (DO) |
| Absolute maximum ADC | 100 mA (DO)                     |
| Signal definition    | IN, OUT, IGDND OGND             |

## Others

|                |  |
|----------------|--|
| Reset button   | 1 x RST  |
| Expansion      | 1 x USB 2.0 Host; 5 V/500 mA                             |
| LED indicators | 1 x RUN, 1 x Modem, 1 x USR, 1 x RSSI, 1 x NET, 1 x WiFi |
| Built-in       | Watchdog   |

## Software (Basic features of RobustOS)

|                   |   |
|-------------------|---|
| Network protocols | PPP, PPPoE, TCP, UDP, DHCP, ICMP, NAT, HTTP, HTTPS, DNS, ARP, NTP, SMTP, Telnet, SSH2, DDNS, etc. |
| VPN tunnel        | IPsec, OpenVPN, GRE   |
| Firewall          | DMZ, anti-DoS, Filtering (IP/Domain name/MAC address), Port Mapping, Access Control               |
| Remote management | Web, CLI, SMS   |
| Serial port       | Transparent, TCP Client/Server, UDP, Modbus RTU to TCP  |
| Others            | Smart Reboot, Data Guard, Smart Roaming, etc.   |

## SDK

|                                 |        |
|---------------------------------|--------|
| Supported programming languages | C, C++ |
| Flash available for SDK         | 5 MB   |
| RAM available for SDK           | 256 MB |

## App Center (Available Apps for RobustOS)

|       |   |
|-------|---|
| Apps* | L2TP, PPTP, DMVPN, VRRP, QoS, SNMP, Language, RCMS, Dynamic Route, Captive Portal, Modbus Master, TR069 |
|-------|---|

\*Request on demand. For more Apps please visit [www.robustel.com](http://www.robustel.com).

## Power Supply and Consumption

|                   |  |
|-------------------|--|
| Connector         | 3-pin 3.5 mm female socket with lock               |
| Input voltage     | 9 ~ 36 VDC (POE-PD)<br>10 ~ 30 VDC (ACC)           |
| Power consumption | Idle: 520 mA@12 V<br>Data link: 1.8 A (peak) @12 V |

## Physical Characteristics

|                       |  |
|-----------------------|--|
| Ingress protection    | IP30   |
| Housing & Weight      | Aluminum, 500 g  |
| Dimension             | 125 x 100 x 48 mm  |
| Installations         | Desktop, wall mounting and DIN rail mounting                       |
| Operating temperature | -20 ~ +55°C (Normal operation)<br>-25 ~ +70°C (Extended operation) |
| Storage temperature   | -40 ~ +85°C  |
| Relative humidity     | 5 ~ 95%RH  |

## Regulatory and Type Approvals

|               |   |
|---------------|---|
| Environmental | RoHS2.0, WEEE   |
| EMI           | EN 55032 Conducted Emission Class A<br>EN 55032 Radiated Emission Class A |
| EMS           | EN 61000-3-2 (Harmonic Current)   |
|               | EN 61000-3-3 (Voltage Flicker)  |
|               | EN 61000-4-2 (ESD) Contact Level 2, Air Level 3                           |
|               | EN 61000-4-3 (RS) Level 2   |
|               | EN 61000-4-4 (EFT) Level 2  |
|               | EN 61000-4-5 (Surge)  |
|               | Line to line Level 3, Line to ground Level 1                              |
|               | EN 61000-4-6 (CS) Level 2   |
|               | EN 61000-4-11 (Dips) Class 2  |

# ORDERING INFORMATION

| Model            | PN      | GNSS | ACC | POE-PD | Frequency Bands*  | Country/Region | Certification (*In progress)   |
|------------------|---------|------|-----|--------|---|----------------|--|
| R5020-5G-A09GL-A | B064803 | *    | ✓   | -      | <b>5G:</b> NR NSA/NR SA:<br>n1/n2/n3/n5/n7/n8/n12/n20/n25/n28/n38/n40/n41/n48<br>/n66/n71/n77/n78/n79<br><b>4G:</b> LTE FDD:<br>B1/B2/B3/B4/B5/B7/B8/B12(B17)/B13/B14/B18/B19/B20<br>/B25/B26/B28/B29/B30/B32/B66/B71<br>LTE TDD: B34/B38/B39/B40/B41/B42/B43/B48<br><b>3G:</b> WCDMA: B1/B2/B3/B4/B5/B6/B8/B19 | Global         | E-Mark, FCC, CE, IC, RCM, UKCA, CB, TDRA                             |
| R5020-5G-A09GL-B | B064802 | *    | -   | ✓      |   |                | E-Mark, FCC, CE, IC, RCM, UKCA, PTCRB, AT&T, CB, TDRA, POSTEL, SIRIM |

\* GNSS: Required 4-in-1 Combo Antenna.

\* For more information about frequency bands in different countries, please contact your Robustel sales representative.