



# 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
 RoHS/RoHS II Compliant

## Features

- Operates in 698-2700 MHz
- Linear polarization
- Low VSWR
- FPC flexible or PCB material (Optional)
- Omni-directional pattern
- IPEX connector with cable, or Solder direct

## Applications

- Cellular
- Transportation
- Industrial wearable
- Smart city
- Smart agriculture
- Home automation

## Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range		698~960/1710~2690		MHz	
VSWR	1.4		1.9		
Polarization Model	Linear				
Impedance		50		$\Omega$	
Gain		2.0		dBi	

## Mechanical Characteristics

Parameters	Description
Connector	IPEX
Cable Type	RF1.13
Mounting	Embedded
FPC Dimensions	68 x 58 x 0.4 mm

## Environmental Characteristics

Parameters	Note
Operating Temperature	-40°C to +85°C
Vibration	10 to 55Hz with 1.5mm amplitude 2 hours
ROHS Compliant	Yes
MSL Level	1




# 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

## Dimensions

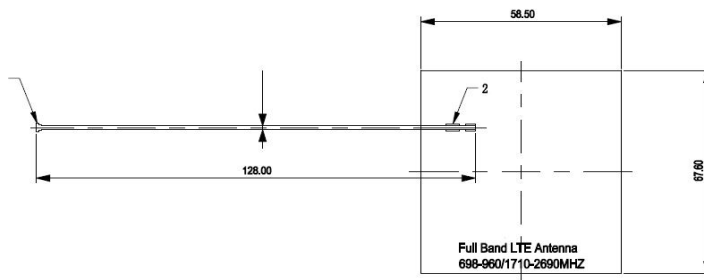

## Product Image







# 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

## Antenna parameters

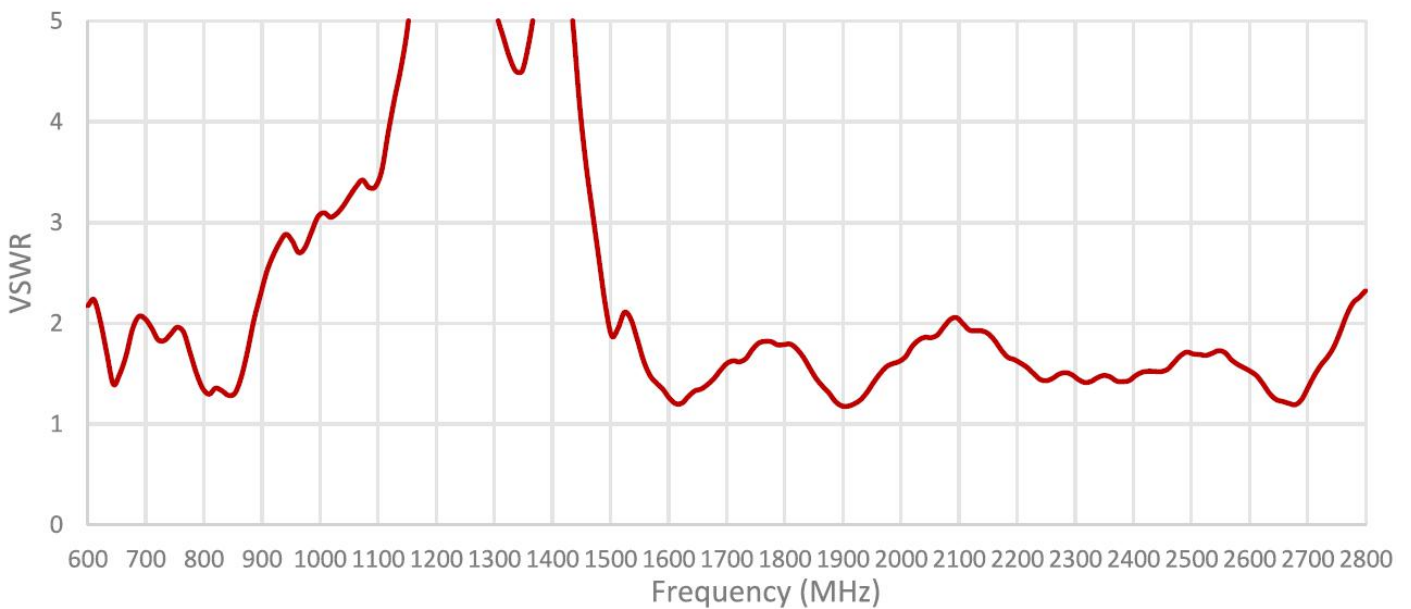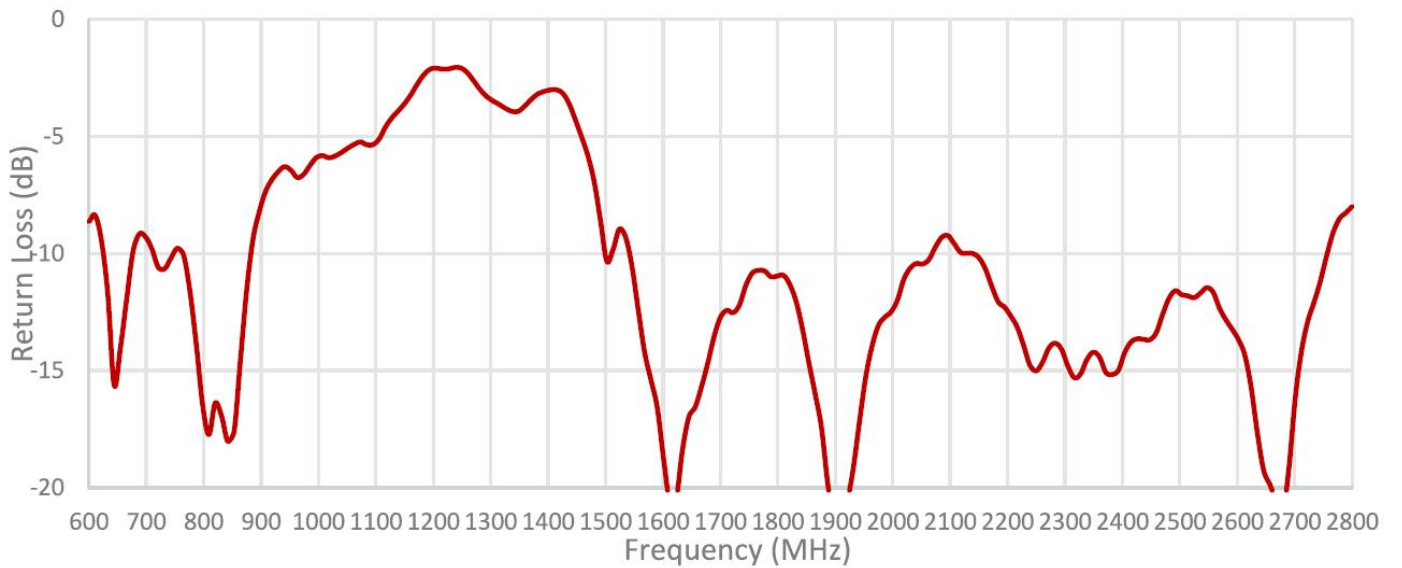





# 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

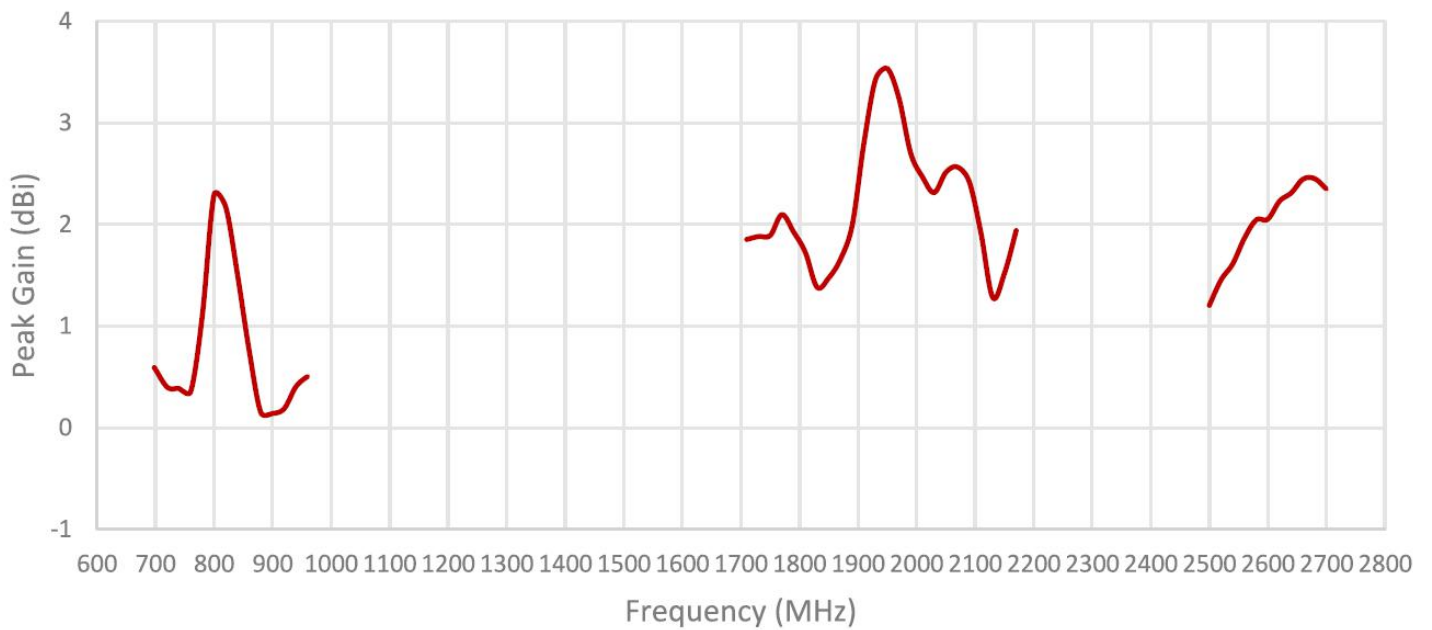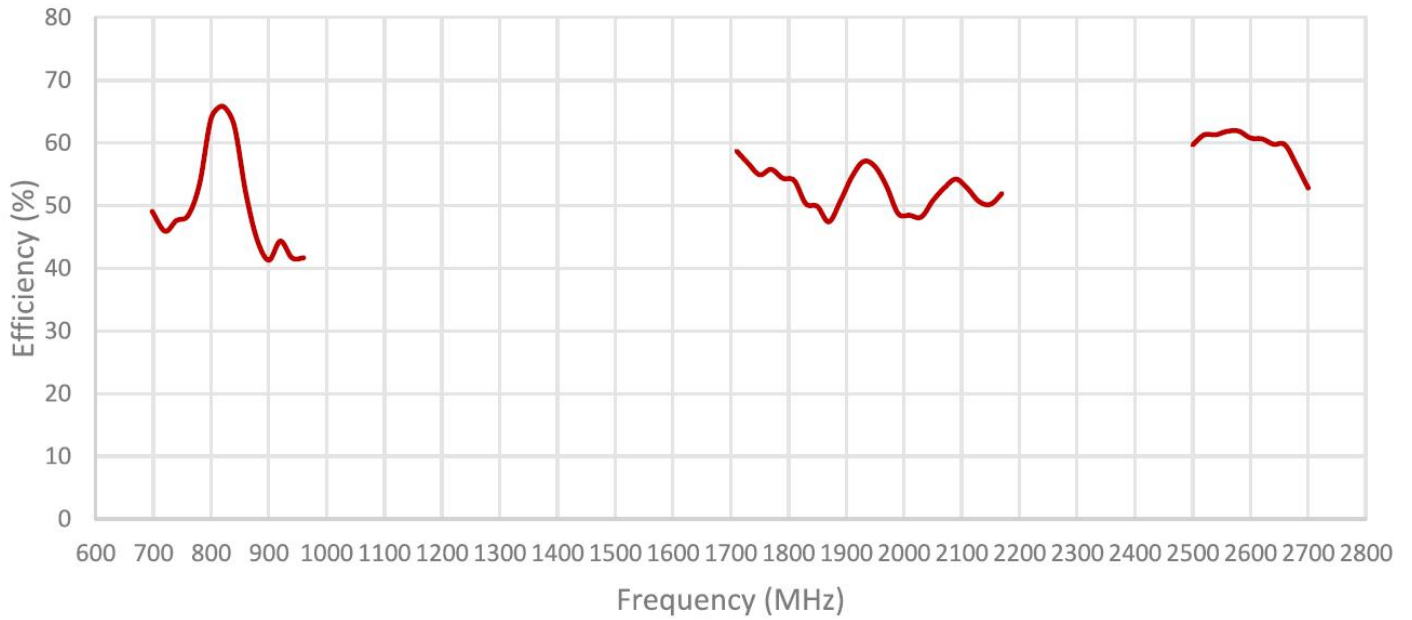




# 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

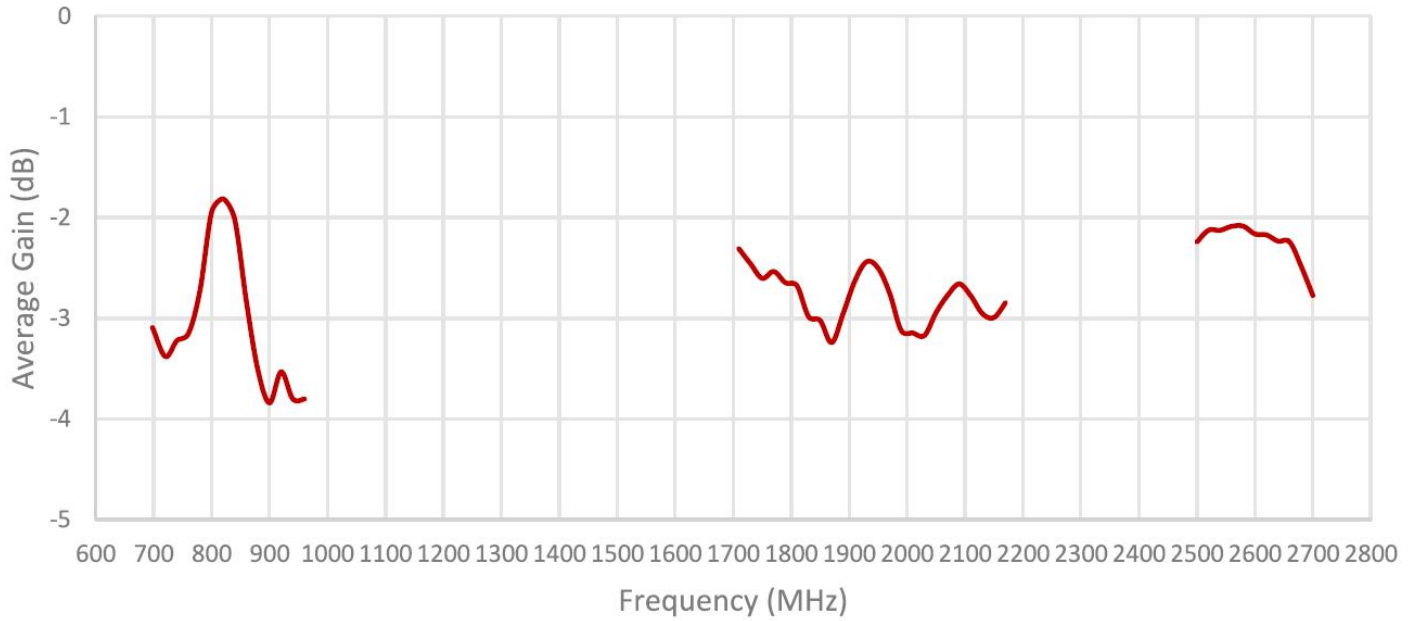

Frequency (MHz)	Efficiency	Gain (dBi)
698	0.49	0.6
824	0.66	2.2
868	0.50	1
960	0.42	0.5
1710	0.59	1.8
1850	0.50	1.4
1990	0.48	2.6
2170	0.52	1.9
2690	0.53	2.3




# 4G/LTE Flexible Printed Antenna




Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

## 3D – Pattern

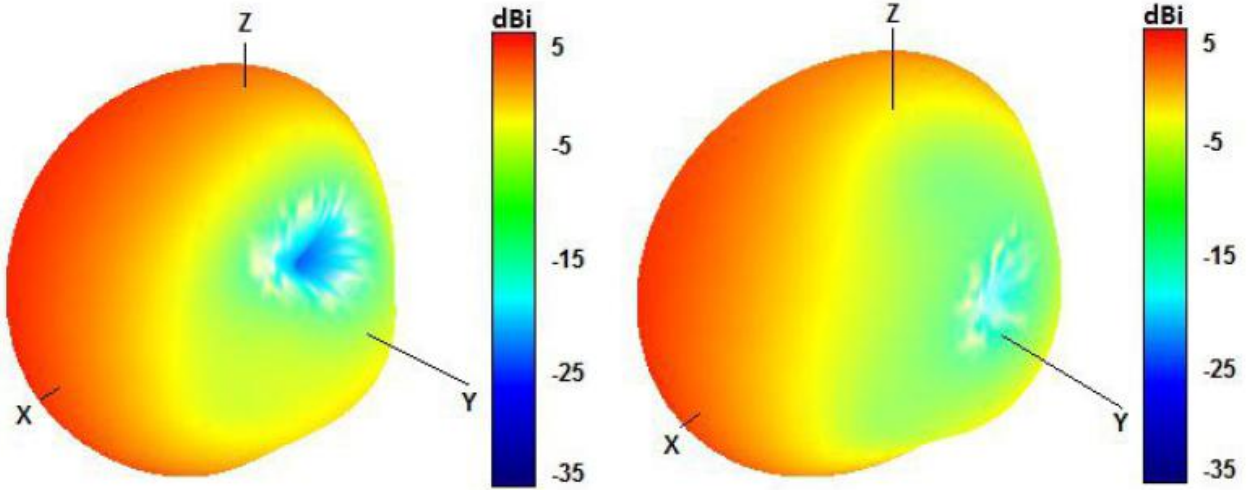

750 and 850 MHz Radiation pattern

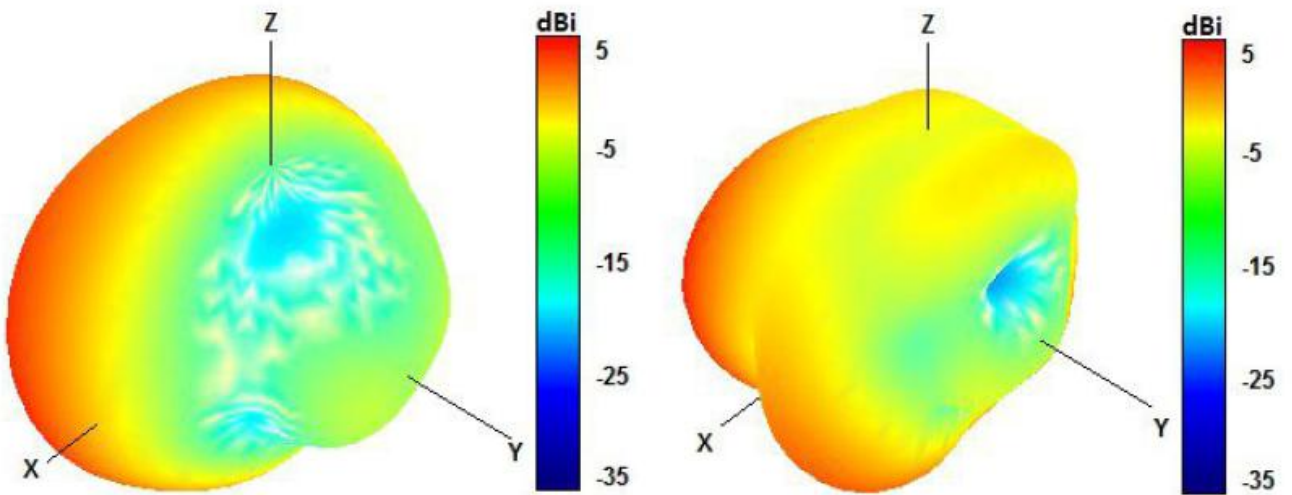

940 and 1750 MHz Radiation pattern




# 4G/LTE Flexible Printed Antenna




Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

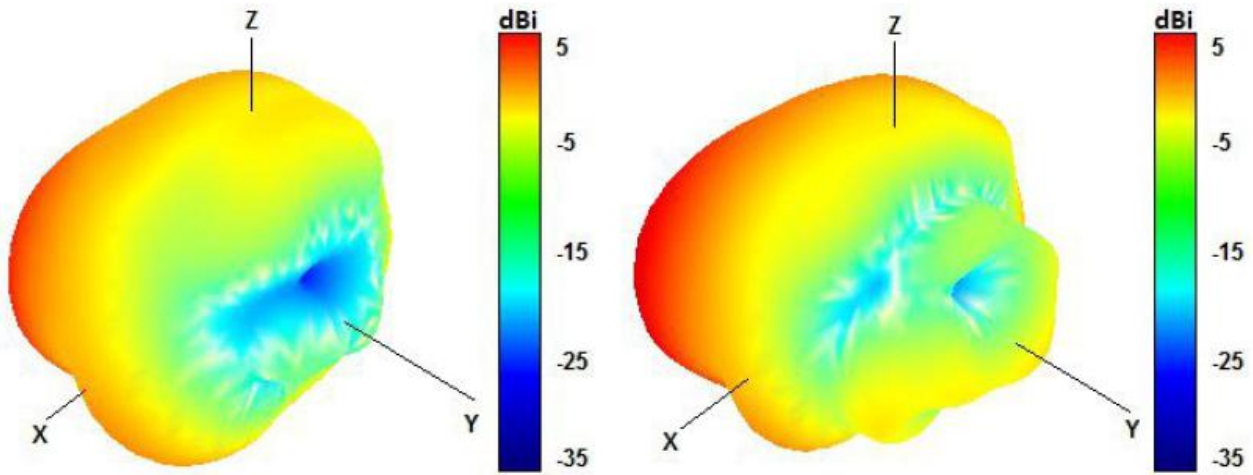

1850 and 1950 MHz Radiation pattern

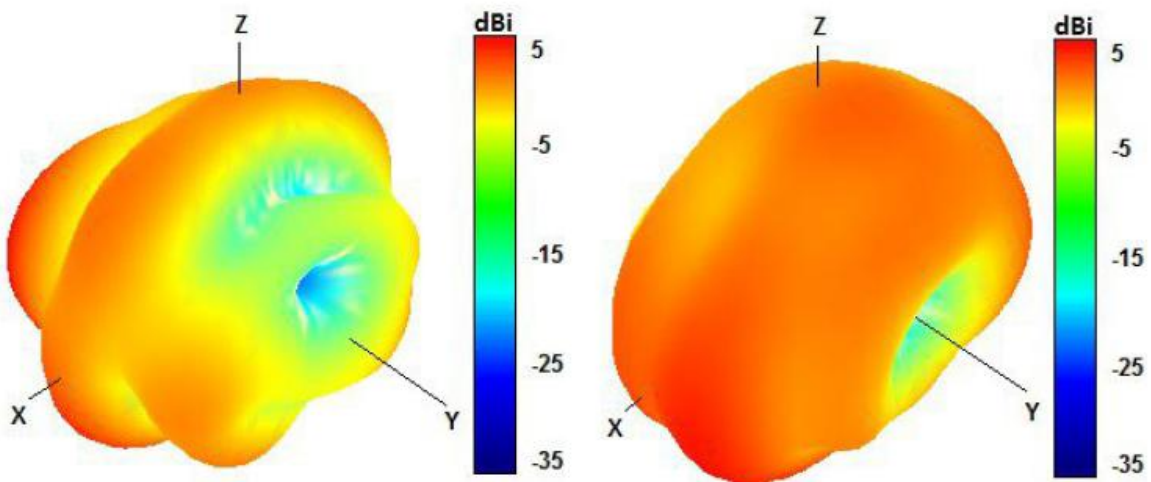

2100 and 2600 MHz Radiation pattern



MiotWireless

Miot Wireless Solutions Ltd  
<http://www.miotsolutions.com>  
[Info@miotsolutions.com](mailto:Info@miotsolutions.com)

## 4G/LTE Flexible Printed Antenna



Part Number: L-2FA2

68 x 58 x 0.4 mm  
RoHS/RoHS II Compliant

### Packaging

---

**TBD**

### Caution:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please ensure the component is thoroughly evaluated in the application circuit.