

CR17450L


Lithium Manganese
Dioxide(Li-MnO₂)Batteries

Specifications




Nominal Voltage	3V
Nominal Capacity* ¹	2400mAh
Max. Discharge Current* ²	1000mA
Max. Pulse Current* ³	2500mA
Standard Discharge Current	5mA
Operating Temperature* ⁴	-40~+70°C
Approx. Weight	23.5g
UL Component Recognition	MH28717

- *1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 23±2°C.
- *2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 2.0V at 23±2°C.
- *3 Current value for obtaining 1.0V cell voltage when pulse is applied for 3s on and 27s off at 50% discharge depth(50% of the nominal capacity) at 23±2°C.
- *4 Consult EVE when using batteries at temperatures exceeding the -20°C To +40°C range.

Dimensions (mm)

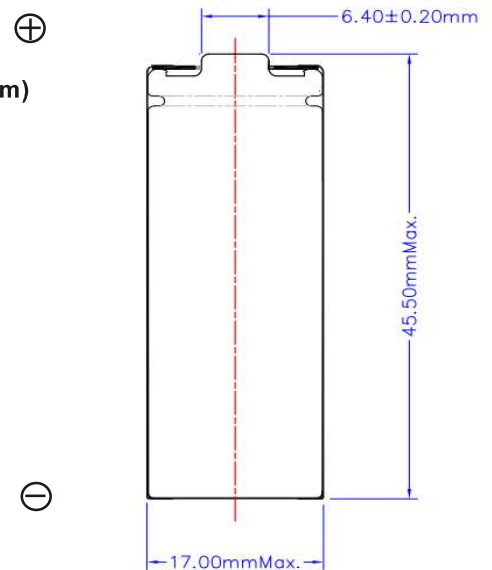

Discharge performance (Typical values for cells stored for one year or less, at 23±2°C)

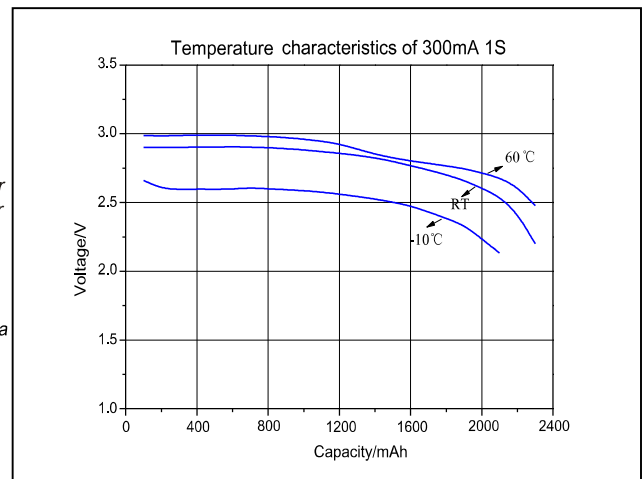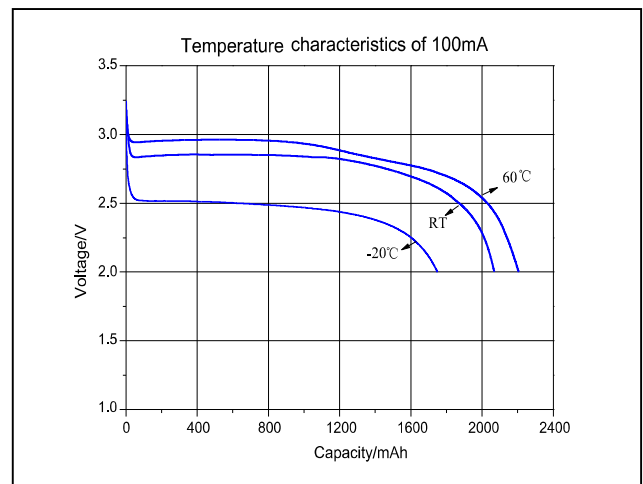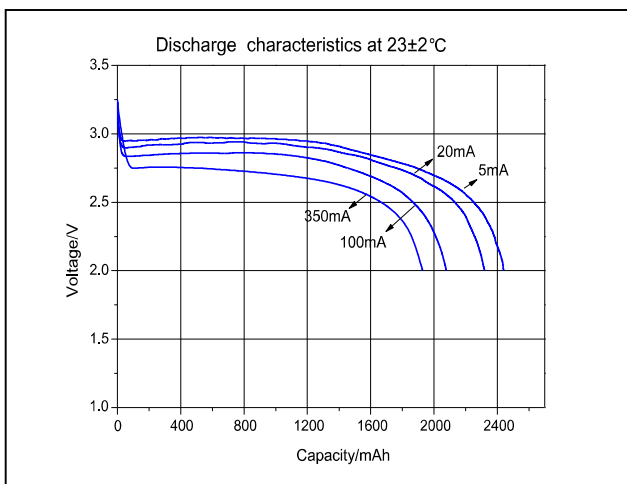

■ Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.

■ Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.

EVE ENERGY CO., LTD.

Address.:NO.38, Hui Feng 7th Road, Zhongkai Hi-Tech Zone, HuiZhou, Guangdong, China

Operator: (86-752)260 6966 Direct:(86-752)260 5822
 Fax: (86-752)260 6033 P.C.516006