




Quectel

EC21 Mini PCIe Series

IoT/M2M-optimized

LTE Cat 1 Module

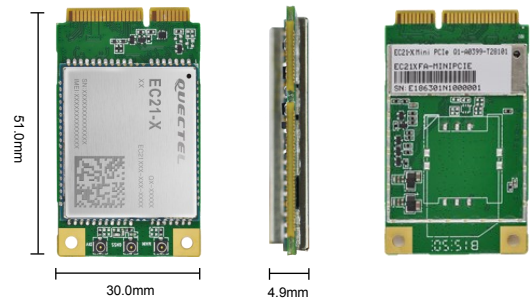

Quectel EC21 Mini PCIe is a series of LTE category 1 module adopting standard PCI Express® Mini Card form factor (Mini PCIe). Specially optimized for M2M and IoT applications, it features cost-effective, low-power LTE connectivity, and delivers M2M-optimized speeds of 10Mbps downlink and 5Mbps uplink. These make it ideal for numerous IoT applications that are not reliant on high speed connectivity but still require the longevity and reliability of LTE networks.

EC21 Mini PCIe contains 10 variants: EC21-E Mini PCIe, EC21-EU Mini PCIe, EC21-EUX Mini PCIe, EC21-A Mini PCIe, EC21-V Mini PCIe, EC21-AUT Mini PCIe, EC21-AU Mini PCIe, EC21-AUX Mini PCIe, EC21-KL Mini PCIe and EC21-J Mini PCIe. This makes it backward-compatible with existing EDGE and GSM/GPRS networks, ensuring that it can easily migrate from LTE to 2G or 3G network.

EC21 Mini PCIe supports Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BeiDou/Compass, Galileo and QZSS). The integrated GNSS greatly simplifies product design, and provides quicker, more accurate and more dependable positioning.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 7/8/8.1/10, Linux, Android/eCall*) extend the applicability of the module to a wide range of M2M applications such as smart metering, tracking and tracing, fleet management, wearable devices, smart home gateways, digital signs, and even drones.



Key Benefits

- ✓ Cost-effective, lower-power LTE connectivity optimized for broadband IoT applications
- ✓ Worldwide LTE, UMTS/HSPA(+) and GSM/GPRS/EDGE coverage
- ✓ Standard PCI Express® Mini Card form factor (Mini PCIe) ideal for manufacturers to easily integrate wireless connectivity into their devices
- ✓ MIMO technology meets demands for data rate and link reliability in modem wireless communication systems
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment



LTE Cat 1
Max 10Mbps (DL)
Max 5Mbps (UL)



Max 42Mbps (DL)
Max 5.76Mbps (UL)



Mini PCIe Package



Embedded Abundant Protocols



eCall*



Multi-constellation GNSS



USB 2.0 High Speed Interface



USB Drivers



Quectel Enhanced AT Commands

Rev.: V1.5 | Status: Released

Quectel EC21 Mini PCIe Series

LTE Cat 1	EC21-E Mini PCIe	EC21-EU Mini PCIe	EC21-EUX Mini PCIe	EC21-A Mini PCIe	EC21-V Mini PCIe
Region/Operator	EMEA/Thailand/India	EMEA/Thailand	EMEA/Thailand	North America	Verizon
Dimensions (mm)	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9
Temperature Range					
Operation Temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended Temperature	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C
Frequency Bands					
LTE-FDD	B1/B3/B5/B7/B8/B20	B1/B3/B7/B8/B20/B28A	B1/B3/B7/B8/B20/B28A	B2/B4/B12	B4/B13
WCDMA	B1/B5/B8	B1/B8	B1/B8	B2/B4/B5	\
GSM/EDGE	B3/B8	B3/B8	B3/B8	\	\
GNSS	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)
Certifications					
Carrier	Global: Vodafone Europe: Deutsche Telekom/Telefónica*	Europe: Deutsche Telekom	\	North America: AT&T/T-Mobile/ U.S. Cellular Canada: Rogers/Telus	North America: Verizon
Regulatory	Global: GCF Europe: CE Russia: FAC	Global: GCF Europe: CE Taiwan (China): NCC Australia/New Zealand: RCM	Global: GCF* Europe: CE* Australia/New Zealand: RCM*	North America: FCC/PTCRB Canada: IC	Global: GCF North America: FCC
Others	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL
Data Transmission					
LTE-FDD Data Rate (Mbps)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)
DC-HSPA+ Data Rate (Mbps)	Max 42 (DL)/ 5.76 (UL)	Max 42 (DL)/ 5.76 (UL)	Max 42 (DL)/ 5.76 (UL)	Max 42 (DL)/ 5.76 (UL)	\
WCDMA Data Rate (Kbps)	Max 384 (DL)/ 384 (UL)	Max 384 (DL)/ 384 (UL)	Max 384 (DL)/ 384 (UL)	Max 384 (DL)/ 384 (UL)	\
EDGE Data Rate (Kbps)	Max 296 (DL)/ 236.8 (UL)	Max 296 (DL)/ 236.8 (UL)	Max 296 (DL)/ 236.8 (UL)	\	\
GPRS Data Rate (Kbps)	Max 107 (DL)/ 85.6 (UL)	Max 107 (DL)/ 85.6 (UL)	Max 107 (DL)/ 85.6 (UL)	\	\
Interfaces					
(U)SIM	x 1	x 1	x 1	x 1	x 1
UART	x 1	x 1	x 1	x 1	x 1
USB 2.0	x 1	x 1	x 1	x 1	x 1
Audio Digital (PCM)	x 1	x 1	x 1	x 1	x 1
I2C	x 1	x 1	x 1	x 1	x 1
LED_WWAN#	x 1	x 1	x 1	x 1	x 1
W_DISABLE#	x 1	x 1	x 1	x 1	x 1
PERST#	x 1	x 1	x 1	x 1	x 1
Voice					
Speech Codec Modes	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB
Echo Arithmetic	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression
VoLTE	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)
Enhanced Features					
eCall *	●	●	●	●	●
DTMF	●	●	●	●	●
DFOTA	●	●	●	●	●
QMI/ Rmnet	●	●	●	●	●
Audio Playback*/ Audio Recording*	Optional	Optional	Optional	Optional	Optional
QuecLocator®	●	●	●	*	*
QuecFile	●	●	●	●	●
(U)SIM Card Detection	●	●	●	●	●
Drivers					
USB Serial Driver	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x
GNSS Driver	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL Driver	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS Driver	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/ 8/ 8.1/ 10	Windows 7/8/8.1/10	Windows 7/8/8.1/10
MBIM Driver	Windows 8/8.1/10, Linux 3.18~5.4	Windows 8/8.1/10, Linux 3.18~5.4	\	Windows 8/8.1/10, Linux 3.18~5.4	Windows 8/8.1/10, Linux 3.18~5.4
GobiNet Driver	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4
QMI_WWAN Driver	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4
Electrical Features					
Supply Voltage Range	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.
Power Consumption	3.9mA @Sleep, Typ. 30mA @Idle	3.4mA @Sleep, Typ. 23mA @Idle	3.2mA @Sleep, Typ. 22mA @Idle	3.5mA @Sleep, Typ. 32mA @Idle	3.8mA @Sleep, Typ. 30mA @Idle

Notes:
1. * means under development.
2. ● means supported.

Quectel EC21 Mini PCIe Series

LTE Cat 1	EC21-AUT Mini PCIe	EC21-AU Mini PCIe	EC21-AUX Mini PCIe	EC21-KL Mini PCIe	EC21-J Mini PCIe
Region/Operator	Australia	Latin America/Australia/ New Zealand	Latin America/Australia/ New Zealand	South Korea	Japan
Dimensions (mm)	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9	51.0 × 30.0 × 4.9
Temperature Range					
Operation Temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended Temperature	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C	-40°C ~ +80°C
Frequency Bands					
LTE-FDD	B1/B3/B5/B7/B28	B1/B2 ^① /B3/B4/B5/B7/B8/B28	B1/B2 ^① /B3/B4/B5/B7/B8/B28	B1/B3/B5/B7/B8	B1/B3/B8/B18/B19/B26
LTE-TDD	\	B40	B40	\	\
WCDMA	B1/B5	B1/B2/B5/B8	B1/B2/B4/B5/B8	\	\
GSM/EDGE	\	B2/B3/B5/B8	B2/B3/B5/B8	\	\
GNSS	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	\	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)
Certifications					
Carrier	Australia: Telstra	Australia: Telstra	\	South Korea: KT/SKT	Japan: NTT DOCOMO/KDDI
Regulatory	Global: GCF Australia/New Zealand: RCM	North America: FCC Canada: IC Brazil: Anatel Taiwan (China): NCC Japan: JATE/TELEC Australia/New Zealand: RCM	Europe: CE North America: FCC Brazil: Anatel Taiwan (China): NCC Australia/New Zealand: RCM	South Korea: KC	Japan: JATE/TELEC
Others	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL
Data Transmission					
LTE-FDD Data Rate (Mbps)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)	Max 10 (DL)/ 5 (UL)
LTE-TDD Data Rate (Mbps)	\	Max 8.96 (DL)/ 3.1 (UL)	Max 8.96 (DL)/ 3.1 (UL)	\	\
DC-HSPA+ Data Rate (Mbps)	Max 42 (DL)/ 5.76 (UL)	Max 42 (DL)/ 5.76 (UL)	Max 42 (DL)/ 5.76 (UL)	\	\
WCDMA Data Rate (Kbps)	Max 384 (DL)/ 384 (UL)	Max 384 (DL)/ 384 (UL)	Max 384 (DL)/ 384 (UL)	\	\
EDGE Data Rate (Kbps)	\	Max 296 (DL)/ 236.8 (UL)	Max 296 (DL)/ 236.8 (UL)	\	\
GPRS Data Rate (Kbps)	\	Max 107 (DL)/ 85.6 (UL)	Max 107 (DL)/ 85.6 (UL)	\	\
Interfaces					
(U)SIM	x 1	x 1	x 1	x 1	x 1
UART	x 1	x 1	x 1	x 1	x 1
USB 2.0	x 1	x 1	x 1	x 1	x 1
Audio Digital (PCM)	x 1	x 1	x 1	x 1	x 1
I2C	x 1	x 1	x 1	x 1	x 1
LED_WWAN#	x 1	x 1	x 1	x 1	x 1
W_DISABLE#	x 1	x 1	x 1	x 1	x 1
PERST#	x 1	x 1	x 1	x 1	x 1
Voice					
Speech Codec Modes	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB
Echo Arithmetic	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression
VoLTE	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)
Enhanced Features					
eCall *	●	●	●	●	●
DTMF	●	●	●	●	●
DFOTA	●	●	●	●	●
QMI/ RmNet	●	●	●	●	●
Audio Playback*/ Audio Recording*	Optional	Optional	Optional	Optional	Optional
QuecLocator [®]	●	●	●	●	●
QuecFile	●	●	●	●	●
(U)SIM Detection	●	●	●	●	●
Drivers					
USB Serial Driver	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/9.x
GNSS Driver	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	\	Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL Driver	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS Driver	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10
MBIM Driver	Windows 8/8.1/10, Linux 3.18~5.4	Windows 8/8.1/10, Linux 3.18~5.4	\	Windows 8/8.1/10, Linux 3.18~5.4	Windows 8/8.1/10, Linux 3.18~5.4
GobiNet Driver	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4	Linux 2.6~5.4
QMI_WWAN Driver	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4	Linux 3.4~5.4
Electrical Features					
Supply Voltage Range	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.	3.0V~3.6V, 3.3V Typ.
Power Consumption	3.2mA @Sleep, Typ. 22mA @Idle	2.8mA @Sleep, Typ. 24mA @Idle	1.8mA @Sleep, Typ. 22mA @Idle	3.2mA @Sleep, Typ. 22mA @Idle	3.2mA @Sleep, Typ. 32mA @Idle

Notes

- ① LTE-FDD B2 of EC21-AU Mini PCIe and EC21-AUX Mini PCIe does not support Rx-diversity.
- * means under development.
- means supported.